




ADDENDUM NO. 1
CORPORATION OF THE TOWNSHIP OF KILLALOE-HAGARTY-RICHARDS
ROUND LAKE CENTRE BOAT LAUNCH UPGRADES
RFT-05-2026

TO ALL TENDERERS


This Addendum shall form part of the Contract Documents and **shall be noted in Appendix B**. Ensure that all parties and subtrades submitting bids are aware of the items included in this Addendum.

Changes:


1. Revise precast ramp lengths from 13'-2" to 14'-0" (See Below)
2. Revise width of riprap shoulder on the dock side from 24" to 12". Other side remains 24". (See below)

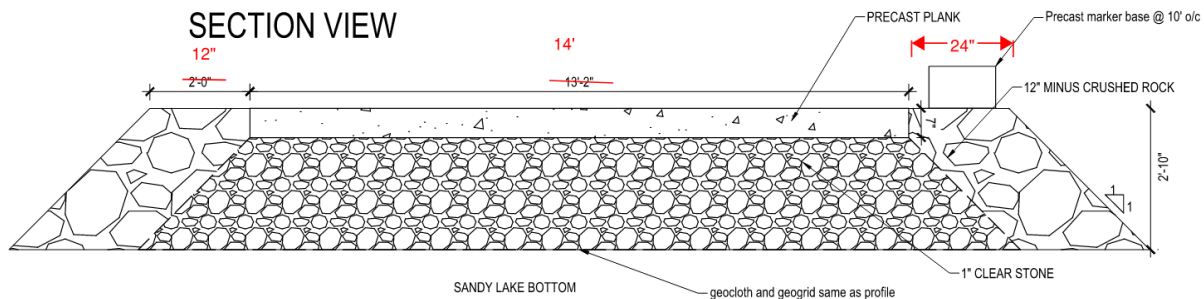

3. Add provisional item for building a cofferdam in the case of above average water levels. Please add price for a sandbag cofferdam 24" high and 60' in length.
4. Revise additional rip rap area from 100 sq.ft. to 200 sq ft.
5. Reduce amount of concrete to be removed from 44'-6" to 16'-0" (See below)

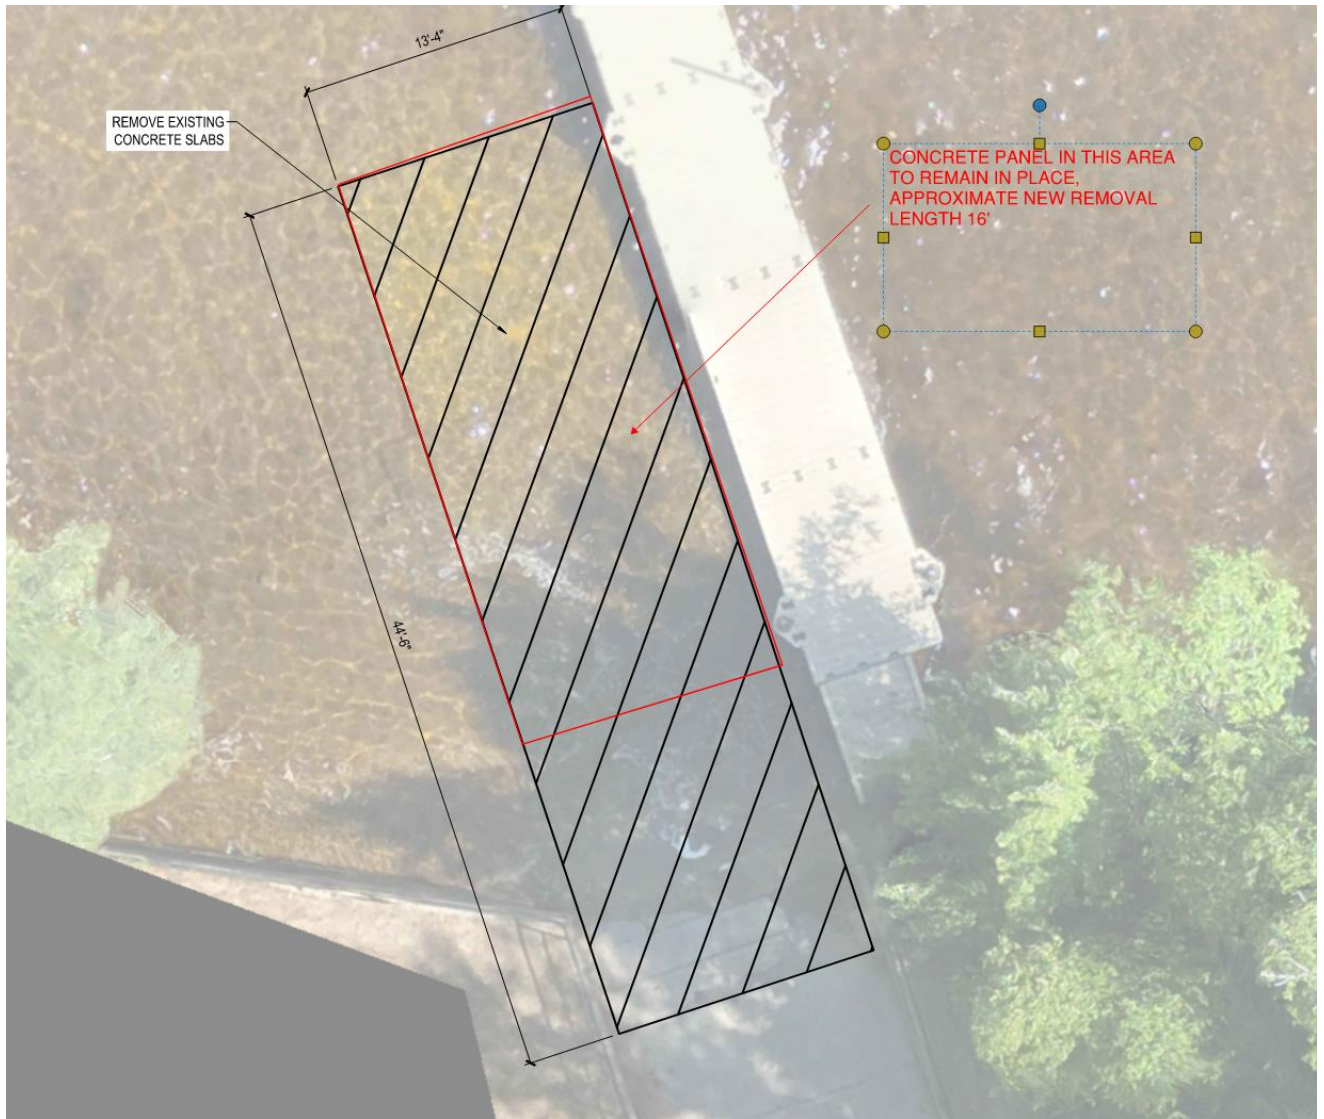

6. Amount of precast bases to be (4) total. Pipe insert size to be changed from $\frac{1}{2}$ " to 1-1/2" (Confirm size with owner before casting). Bases to be depressed into riprap so the top of base is same as top of rip rap.
7. Add path to dock. 6" clear stone base 4'W and 12' total length. Add 6- 24"x24"x1" patio stone path. (See below)

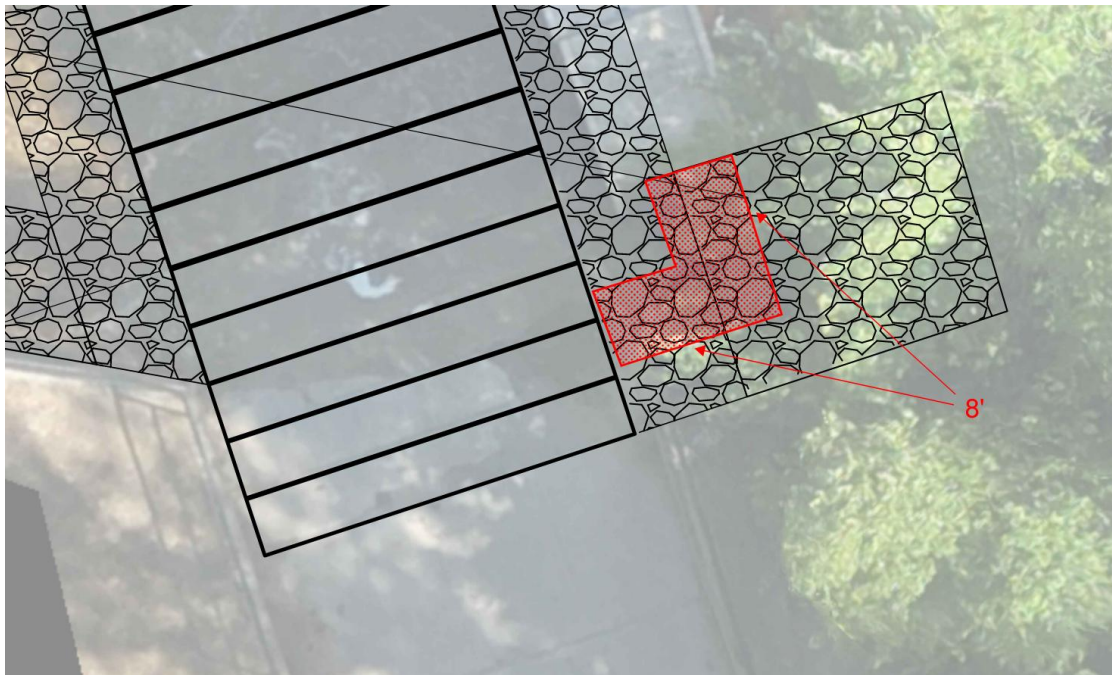

8. Area in front of retaining wall may be used as a laydown area once all water has receded, no materials shall be placed in water at any time.

Please direct all technical question to ian.johnson@jp2g.com during this tender period.

TENDERER'S NAME (Company)

Date of Issue – August 11, 2026

SIGNATURE

Closing Date – August 21, 2026

NAME (please print)

Closing Time – 8:59:59 AM Local time

DATE

ADDENDA ISSUED BY

Jp2g Consultants Inc.
12 International Drive
Pembroke, Ontario K8A 6W5
Telephone: (613) 735-2507 Fax: (613)735-4513